

SLICE® Complete Pack

Exothermic portable cutting pack complete with its own ignition source and oxygen cylinder and regulator



SLICE Complete Pack

Go anywhere and cut, burn, or pierce virtually any metallic, non-metallic or composite material with this exothermic cutting pack.


A self-contained cutting system lends itself well to the emergency / forced entry type cutting situations where seconds count.

- Improved torch handle & rubber shield to improve the operators grip and provide protection from molten spray when piercing
- Improved striker assembly that incorporates a slide mechanism that allows the operator to only expose a small portion of the ignition bar (copper) which increases the life of the striker copper bar
- Improved battery box with improved features over prior model
 - Faster recharging of a "dead" battery
 - Better visual "gas gauge" indicating battery condition
 - Over-charging safe guard

Visit esab.com for more information.

Industry

- Bridge Construction
- Industrial and General Fabrication
- Mining
- Repair and Maintenance
- Steel Erectors

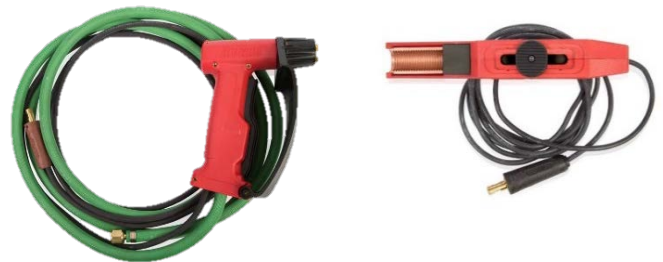

SLICE® Complete Pack

Specifications	
Main Voltage (Input)	120 V AC 60 Hz & 220 VAC 50 Hz
Output Voltage	12 V DC
Recharge Time (fully drained battery)	6 h
Exothermic Cutting Rods	1/4 in. x 22 in. Uncoated – 25 pieces
Length Of Power Cable & Oxygen Hose	10 ft. (3 m)
Power Cable AWG Size	#10
Certification Mark (Standards)	CE
Dimensions L x W H (Without Cylinder)	15 in. x 25 in. x 8 in. (400.05 mm x 638.18 mm x 206.38 mm)
Dimensions L x W H (With Cylinder)	15 in. x 27 in. x 8 in. (400.05 mm x 688.98 mm x 206.38 mm)
Weight Without Cylinder	39.05 lbs (17.71 kg)
Weight With Cylinder	70 lbs. (31.75 kg)

Ordering Information	
SLICE Complete Pack – 120 V AC 60 Hz	63991040
SLICE Complete Pack – 220 V AC 50 Hz	63991042

Options and Accessories	
SLICE Battery Ignition Source	96-076-040
Power Adapter w/ NAM Power Lead	96-076-041
SLICE Cutting Torch w/ #10 Power Cable (When Igniting w/ 12V Battery & Cutting w/o Power)	03-003-012
SLICE Cutting Torch w/ #6 (When Igniting 12V Battery & Cutting w/o Power)	03-003-011
SLICE Cutting Torch w/ #1 (Up to 200 A w/ Power)	03-003-010
SLICE Striker Assembly	72-012-010

Cutting Rods	
SLICE Exothermic Cutting Rods, Flux Coated, 1/4 x 22 - 100 Pcs	42049003
SLICE Exothermic Cutting Rods, Flux Coated, 1/4 x 22 - 25 Pcs	42049002
SLICE Exothermic Cutting Rods, Uncoated, 3/8 x 36 - 25 Pcs	43049009
SLICE Exothermic Cutting Rods, Uncoated, 3/8 x 18 - 50 Pcs	43049007
SLICE Exothermic Cutting Rods, Uncoated, 1/4 x 22 - 25 Pcs	43049002
SLICE Exothermic Cutting Rods, Uncoated, 1/4 x 44 - 25 Pcs	43049005
SLICE Exothermic Cutting Rods, Flux Coated, 3/8 x 18 - 50 Pcs	42049005
SLICE Exothermic Cutting Rods, Uncoated, 1/4 x 22 - 100 Pcs	43049003



ESAB / esab.com

